


PLAN VIEW



NOT TO SCALE

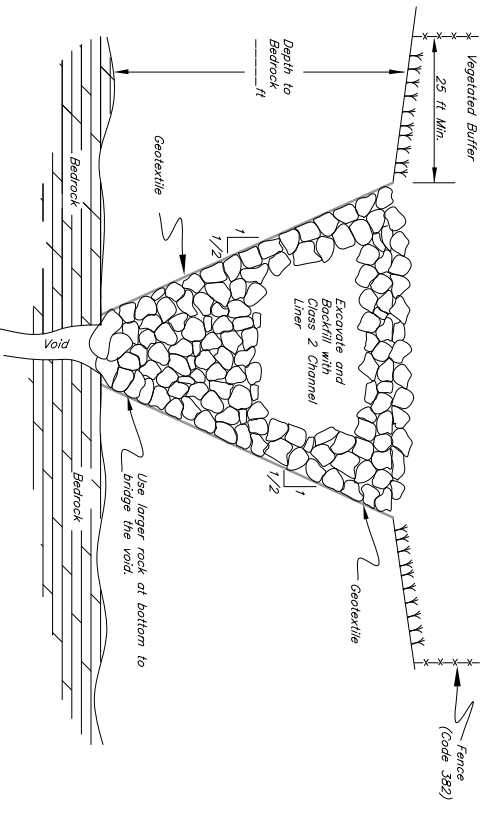

Notes:

1. Flatten the slopes as necessary due to soil conditions.
2. Use care when installing the geotextile.
3. The minimum distance to a structure or road is 75 ft.
4. Seed and mulch all areas disturbed during construction according to the Critical Area Planting standard (Code 342).
5. The structure shall not be located in an area where temporary ponding will be detrimental.
6. The sinkhole and surrounding buffer area will be fenced according to NRCS standard 382, Fence.

ESTIMATED QUANTITIES

Backhoe	-----	Hrs
Riprap	-----	Tons
Geotextile	-----	SY

CONSTRUCTION CHECK OUT NOTES

Backhoe	-----	Hrs
Riprap	-----	Tons
Geotextile	-----	SY

To the best of my professional knowledge, judgement and belief the installed practice meets NRCS standards.

Signature: _____ Title: _____ Date: _____

The location and preservation of any underground utilities that may be present is the responsibility of the contractor.

KARST SINKHOLE TREATMENT
ENG. JOB CLASS



KARST SINKHOLE TREATMENT
(CODE 527)

Landowner: _____ County: _____
Location: _____

Designed D. Canary 08-2011
 Drawn M. Givens 08-2011
 Checked _____
 Approved _____

File No. _____
 Drawing No. K1-327-11
 Sheet 1 of 1